

Features


Used for control of time order
 With front-surface and back-surface
 connecting sockets
 LED pilot, display action state



ST2P-E

Model Meaning

ST2P - E AC220V

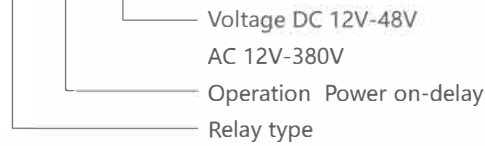

Specification

Item No.	Data
Voltage	DC12V-48V AC12V-380V 50HZ
Power expend	DC1.0W AC1.0VA
Control output	5A 220V AC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈50g
Installing Holing Size	40×50mm

Time Range

Unit	Time range
S	1S,2S,3S,6S,12S,30S,60S
M	2M,3M,5M,6M,12M,30M,60M
H	3H,6H,12H,24H

Dimension

ST2P-E Delay Waveform