


Features

80A 2Z Contact Change-over Capacity
With Opening and Dust-proof Type



JQX-62F 2Z 80A

Model Meaning

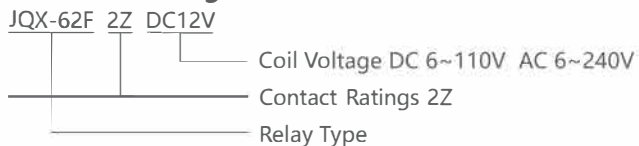

Contact Rating

Contact Rating	2Z,2H,2D
Contact Resistance	100mΩ(1A 6VDC)
Contact material	AgCdO
Contact capacity	80A 120A 250VAC

Specification

Insulation Resistance	1000MΩ, 500VDC
Dielectric Strength	BCC 1200V 1min
	BOC 2500V 1min
Operate Time	25ms/25ms
Terminal Type	Terminal mounting


Coil Rating

Nominal Coil Power: DC2.0W AC2.5VA

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω:±10%	Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω:±10%
6	4.80	0.60	18	6	4.80	1.80	9
12	9.60	1.20	70	12	9.60	3.60	36
24	19.2	2.40	290	24	19.20	7.20	144
48	38.4	4.80	1152	48	38.40	14.4	576
60	80.0	6.00	2800	110	88.00	36.0	3500
110	88.0	11.0	9650	220/240	176.00	72.0	12000/14400

Dimension

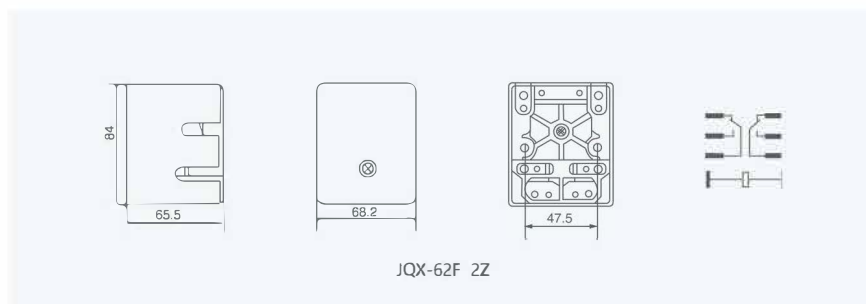

Reference Data

