


### Non-Insulated Cord End Terminals

The limit of working temperature: 105 Ui=300V; Tip material: Copper tube

Model	conductor cross-section		Size(mm)			
	A.W.G	mm <sup>2</sup>	L	D	C	W
EN0506	#22	0.5	6.0	1.3	1.0	2.1
EN7506	#20	0.75	6.0	1.5	1.2	2.5
EN1006	#18	1.0	6.0	1.7	1.4	2.7
EN1010	#18	1.0	10.0	1.7	1.4	2.7
EN1507	#16	1.5	7.0	2.0	1.7	3.5
EN1510	#16	1.5	10.0	2.0	1.7	3.5
EN2507	#14	2.5	7.0	2.5	2.2	2.5
EN2512	#14	2.5	12.0	2.5	2.2	2.5
EN4009	#12	4.0	9.0	3.2	2.8	4.0
EN4012	#12	4.0	12.0	3.2	2.8	4.0
EN6010	#10	6.0	10.0	3.9	3.5	4.8
EN6012	#10	6.0	12.0	3.9	3.5	4.8
EN6015	#10	6.0	15.0	3.9	3.5	4.8
EN10-12	#7	10.0	12.0	4.9	4.5	5.8
EN10-15	#7	10.0	15.0	4.9	4.5	5.8
EN10-15	#7	10.0	18.0	4.9	4.5	5.8
EN16-12	#5	16.0	12.0	6.2	5.8	7.5
EN16-15	#5	16.0	15.0	6.2	5.8	7.5
EN16-18	#5	16.0	18.0	6.2	5.8	7.5
EN25-16	#4	25.0	16.0	7.9	7.5	9.2
EN25-22	#4	25.0	22.0	7.9	7.5	9.2
EN35-16	#2	35.0	16.0	8.7	8.3	10
EN35-25	#2	35.0	25.0	8.7	8.3	10
EN50-20	#1	50.0	20.0	10.9	10.3	12.4

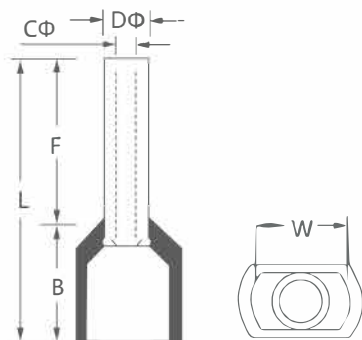

### Non-Insulated Cord End Twin Terminals

The limit of working temperature: 105 Ui=300V; Tip material: Copper tube

Model	NEMA TAB	Size(mm)						Color	
		F	L	W	B	DΦ	CΦ	Germany	France
TE0508	2*0.5	8	14.5	8	6.5	1.8	1.5	White	White
TE7508	2*0.75	8	14.7	8	6.7	2.1	1.8	Blue	Gray
TE7510	2*0.75	10	16.7	10	6.7	2.1	1.8	Blue	Gray
TE1008	2*1.0	8	15.1	8	7.1	2.3	2.0	Red	Red
TE1010	2*1.0	10	17.1	10	7.1	2.3	2.0	Red	Red
TE1508	2*1.5	8	15.5	8	7.2	2.6	2.3	Black	Yellow
TE1512	2*1.5	12	19.5	12	7.5	2.6	2.3	Black	Yellow
TE2510	2*2.5	10	18.5	10	8.5	3.3	2.9	Gray	Blue
TE2513	2*2.5	13	21.5	13	8.5	3.3	2.9	Gray	Blue
TE4012	2*4.0	12	23.1	12	11.1	4.2	3.8	Orange	Gray
TE6014	2*6.0	14	26.1	14	12.1	5.3	4.9	Green	Yellow
TE10-14	2*10.0	14	26.6	14	12.0	6.9	6.5	Brown	Red
TE16-14	2*16.0	14	31.3	8.9	17.3	8.7	8.3	Milky	Blue

