

Motor Control & Protection

YCP6 Motor Starter



YCP6-32P



YCP6-80P

General

YCP6 series Motor protection circuit breaker (also known as: Motor Protector or Motor starter, hereinafter referred to as "circuit breaker") is suitable for AC voltage to 690V, the highest current to 80A circuit, is a circuit breaker integrating the functions of isolation switch, circuit breaker and thermal relay with isolation protection, overload protection, temperature compensation, phase failure protection, short circuit protection. Application range: three-phase mouse cage asynchronous motor direct start and control, distribution line protection and infrequent load conversion.

Standard: IEC60947-2, 60947-4-1.

Type designation

Model	Frame current	Operating method	Rated current
YCP6	32	P	0.16
Motor Circuit Breaker	32:32A 80:80A	P: Knob operation	32A: 0.16 0.25 0.4 0.63 1 1.6 2.5 4 6.3 10 14 18 23 25 32 80A: 25 32 40 50 65 73 80

Operating Conditions

1. The altitude of the installation site is generally not more than 2000m.
2. The lower limit of ambient air temperature is generally not lower than -5°C, and the upper limit is generally not higher than +40°C.
3. The relative humidity of the air is not more than 50% when the temperature is +40°C, and the minimum monthly temperature of the wettest month is 25°C, and the monthly average maximum relative humidity is not more than 90%.
4. The surrounding environment pollution level is 3.
5. Starter installation categories are III.
6. The inclination of the mounion surface and the vertical plane is not more than ±5°.
7. Rated working system: uninterrupted working system, intermittent working system.

Motor Control & Protection

YCP6 Motor Starter

Operating Conditions

1. Rated insulation voltage $U_i(V)$: 690
2. Rated impulse withstand voltage $U_{imp}(kV)$: 8
3. Rated operating voltage $U_e(V)$: 230/240, 400/415, 440, 500, 690
4. Rated frequency(Hz): 50, 60
5. Frame rated current $I_{nm}(A)$: 80A
6. Rated current $I_n(A)$: see Table 1

Hot component setting current adjustment range: rated limit and rated operating short-circuit breaking capacity see Table 1.

Table 1.

Model	Rated current I_n (A)	Setting current adjustment range (A)	Rated ultimate short-circuit breaking capacity ICU, rated operating short-circuit breaking capacity ICS (KA)								Flashover distance (mm)
			Standard Breaking Capacity				High Breaking Capacity				
			400/415V		690V		400/415V		690V		
			ICU	ICS	ICU	ICS	ICU	ICS	ICU	ICS	
YCP6-32P-0.16	0.16	0.1-0.16	100	100	100	100	100	100	100	100	40
YCP6-32P-0.25	0.25	0.16-0.25	100	100	100	100	100	100	100	100	40
YCP6-32P-0.4	0.4	0.25-0.4	100	100	100	100	100	100	100	100	40
YCP6-32P-0.63	0.63	0.4-0.63	100	100	100	100	100	100	100	100	40
YCP6-32P-1	1	0.63-1	100	100	100	100	100	100	100	100	40
YCP6-32P-1.6	1.6	1-1.6	100	100	100	100	100	100	100	100	40
YCP6-32P-2.5	2.5	1.6-2.5	100	100	3	2.25	100	100	8	8	40
YCP6-32P-4	4	2.5-4	100	100	3	2.25	100	100	8	8	40
YCP6-32P-6.3	6.3	4-6.3	100	100	3	2.25	100	100	6	6	40
YCP6-32P-10	10	6-10	100	100	3	2.25	100	100	6	6	40
YCP6-32P-14	14	9-14	15	7.5	3	2.25	100	100	6	6	40
YCP6-32P-18	18	13-18	15	7.5	3	2.25	50	25	4	4	40
YCP6-32P-23	23	17-23	15	6	3	2.25	50	25	4	4	40
YCP6-32P-25	25	20-25	15	6	3	2.25	50	25	4	4	40
YCP6-32P-32	32	24-32	10	6	3	2.25	50	25	4	4	40
YCP6-80P-25	25	17-25	/	/	/	/	100	100	6	3	50
YCP6-80P-32	32	23-32	/	/	/	/	100	100	6	3	50
YCP6-80P-40	40	30-40	/	/	/	/	50	50	6	3	50
YCP6-80P-50	50	37-50	/	/	/	/	50	50	6	3	50
YCP6-80P-65	65	48-65	/	/	/	/	50	50	6	3	50
YCP6-80P-73	73	62-73	/	/	/	/	50	30	6	3	50
YCP6-80P-80	80	70-80	/	/	/	/	50	30	6	3	50

Motor Control & Protection

YCP6 Motor Starter

Table 2.

Type	Standard power ratings of 3-phase molors 50/60Hz in category AC-3						Current setting range
	230/240V	400V	415V	440V	500V	690V	
	kW	kW	kW	kW	kW	kW	
YCP6-32P-0.16	-	-	-	-	-	-	0.1-0.16
YCP6-32P-0.25	-	-	-	-	-	-	0.16-0.25
YCP6-32P-0.4	-	-	-	-	-	-	0.25-0.4
YCP6-32P-0.63	-	-	-	-	-	0.37	0.4-0.63
YCP6-32P-1	-	-	-	0.37	0.37	0.55	0.63-1
YCP6-32P-1.6	-	0.37	-	0.55	0.75	1.1	1-1.6
YCP6-32P-2.5	0.37	0.75	0.75	1.1	1.1	1.5	1.6-2.5
YCP6-32P-4	0.75	1.5	1.5	1.5	2.2	3	2.5-4
YCP6-32P-6.3	1.1	2.2	2.2	3	3.7	4	4-6.3
YCP6-32P-10	2.2	4	4	4	5.5	7.5	6-10
YCP6-32P-14	3	5.5	5.5	7.5	7.5	9	9-14
YCP6-32P-18	4	7.5	9	9	9	11	13-18
YCP6-32P-23	5.5	11	11	11	11	15	17-23
YCP6-32P-25	5.5	11	11	11	15	18.5	20-25
YCP6-32P-32	7.5	15	15	15	18.5	25	24-32
YCP6-80P-25	5.5	11	11	11	15	18.5	17-25
YCP6-80P-32	7.5	15	15	15	18.5	22	23-32
YCP6-80P-40	/	18.5	18.5	/	/	30	30-40
YCP6-80P-50	/	30	30	/	/	45	37-50
YCP6-80P-65	/	30	30	/	/	45	48-65
YCP6-80P-73	/	37	37	/	/	55	62-73
YCP6-80P-80	/	37	37	/	/	55	70-80

The enclosure protection class is IP20.

Motor Control & Protection

YCP6 Motor Starter

The enclosure protection class is IP20.

The operating performance of the circuit breaker is shown in Table 3.

Table 3.

Type	Frame size rated current I_{nm}	Hourly operation cycles	Operation cycle number	
			Electrical life	Mechanical life
YCP6-32P	32	120	10000	100000
YCP6-80P	80	120	10000	20000

Overcurrent action protection

See Table 4, Table 5, and Table 6 for the action characteristics of the circuit breaker when each phase is balanced and unbalanced.

Table 4 Operating characteristics of the circuit breaker when the phases are balanced (Distribution protection)

Type	Distribution breaker			Circumstance temperature
	Setting current multiple	Tripping time	Status	
YCP6-32P YCP6-80P	1.05	1h non-tripping	Initial	+20°C±2°C
	1.3	1h tripping	Following serial 1	
	1.5	< 2min tripping		

Table 5 Action characteristics of balanced load of each phase of the circuit breaker (Motor protection)

Type	Distribution breaker			Circumstance temperature
	Setting current multiple	Tripping time	Status	
YCP6-32P YCP6-80P	1.05	2h non-tripping	Initial	+20°C±2°C
	1.2	2h tripping	Following serial 1	
	1.5	Action within 2 minutes		
	7.2	2~10s 2h tripping	Initial	

Table 6 The action characteristics of the circuit breaker when the load is unbalanced (phase break)

Type	Setting current multiple		Status	Specified time	Expected results	Circumstance temperature
	Any two-phase	Third phase				
YCP6-32P YCP6-80P	1.0	0.9	Cold state	$t \geq 2h$	non-tripping	+20°C±2°C
	1.15	0	Thermal state (In immediate order 1.)	$t \leq 2h$	tripping	

Table 7 The instantaneous electromagnetic buckle action characteristics of short circuit device are shown

Type	Test current	Start status	Specified time	Expected results	Circumstance temperature
YCP6-32P YCP6-80P	$0.8 \times 12 \times I_n$	Cold state	$t \geq 0.2s$	non-tripping	+20°C ± 5°C
	$1.2 \times 12 \times I_n$	Cold state	$t \leq 0.2s$	tripping	+20°C ± 5°C

Motor Control & Protection

YCP6 Motor Starter

Accessories

Attachment Name	YCP6-32P/YCP6-80P	Accessory Specifications	
Undervoltage release	YCP6-AU115	110~150V, 50Hz; 127V, 50Hz	
	YCP6-32P AU225	220~240V, 50Hz	
	YCP6-32P AU385	380~400V, 50Hz; 400V, 60Hz	
Shunt release	YCP6-32P AS115	110~150V, 50Hz; 127V, 60Hz	
	YCP6-32P AS225	220~240V, 50Hz	
	YCP6-32P AS385	380~400V, 50Hz; 440V, 60Hz	
Instantaneous auxiliary contacts (front hanging)	YCP6-32P AE20	2NO	
	YCP6-32P AE11	1NO+1NC	
Instantaneous auxiliary contacts (side hanging)	YCP6-32P AN20	2NO	
	YCP6-32P AN11	1NO+1NC	
Fault signal contacts and instantaneous auxiliary contacts	YCP6-32P AD1010	Fault signal contact NO	NO
	YCP6-32P AD1001		NC
	YCP6-32P AD0110	Fault signal contact NC	NO
	YCP6-32P AD0101		NC



Undervoltage release

Performance of the YCP6-32 AU115, AU225, AU385 of the Undervoltage stripper: Rated insulated voltage U_i (V): 690.

Motion Characteristics:

When the voltage drops to the range of 70% and 35% of the rated voltage, the undervoltage stripper shall act; The Undervoltage stripper shall be able to prevent the starter from closing when the supply voltage is less than 35% of the rated voltage of the stripper, and the undervoltage stripper shall be able to ensure the closure of the starter when the supply voltage is equal to or greater than 85% of the rated voltage



Shunt release

Performance of the YCP6-32 AS115, AS225, AS385 of the shunt release.

Rated insulated voltage U_i (V): 690

Action characteristics:

The operating voltage range of the shunt release stripper is 70%~110% of the rated operating voltage.



Upper auxiliary
AE-11,AE-20

Performance of instantaneous auxiliary contact YCP6-32 AE20, AE11 (front hanging):

Rated insulated voltage U_i (V): 250;

Agreed heating current I_{th} (A): 2.5;

The use category of instantaneous auxiliary contacts, rated operating voltage and rated operating current are shown in the table below.

Motor Control & Protection



YCP6 Motor Starter

Working with categories	AC-15				DC-13		
Rated operating voltage U_e (V)	24	48	110/127	230/240	24	48	60
Rated operating current I_e (A)	2	1.25	1	0.5	1	0.3	0.15
Normal working power P (W)	48	60	127	120	24	15	9

The abnormal connection and breaking ability of fault signal contacts and instantaneous auxiliary contacts are shown in the following table

Working with categories	Connected			Division			Number of cycles and operating frequencies of the pass-through operation		
	I/I_e	U/U_e	$\cos\Phi$ or T0.95	I/I_e	U/U_e	$\cos\Phi$ or T0.95	Number of Operation Loops	Number of operation cycles per minute	Electrified time
AC-14	24	48	48	6	1.1	0.7	24	48	60
AC-15	2	1.25	1.25	10	1.1	0.3	1	0.3	0.15
DC-13	48	60	60	1.1	1.1	6Pe	24	15	9



YCP6-32P Knob type product extension handle

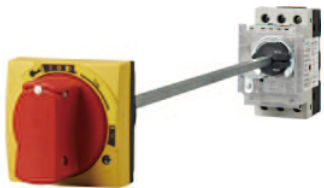	Attachment Type	Function
	AP02	off position locked with padlock, IP54
	AP02	off position locked with padlock, IP54


Motor Control & Protection

YCP6 Motor Starter

Overall and mounting dimensions(mm)

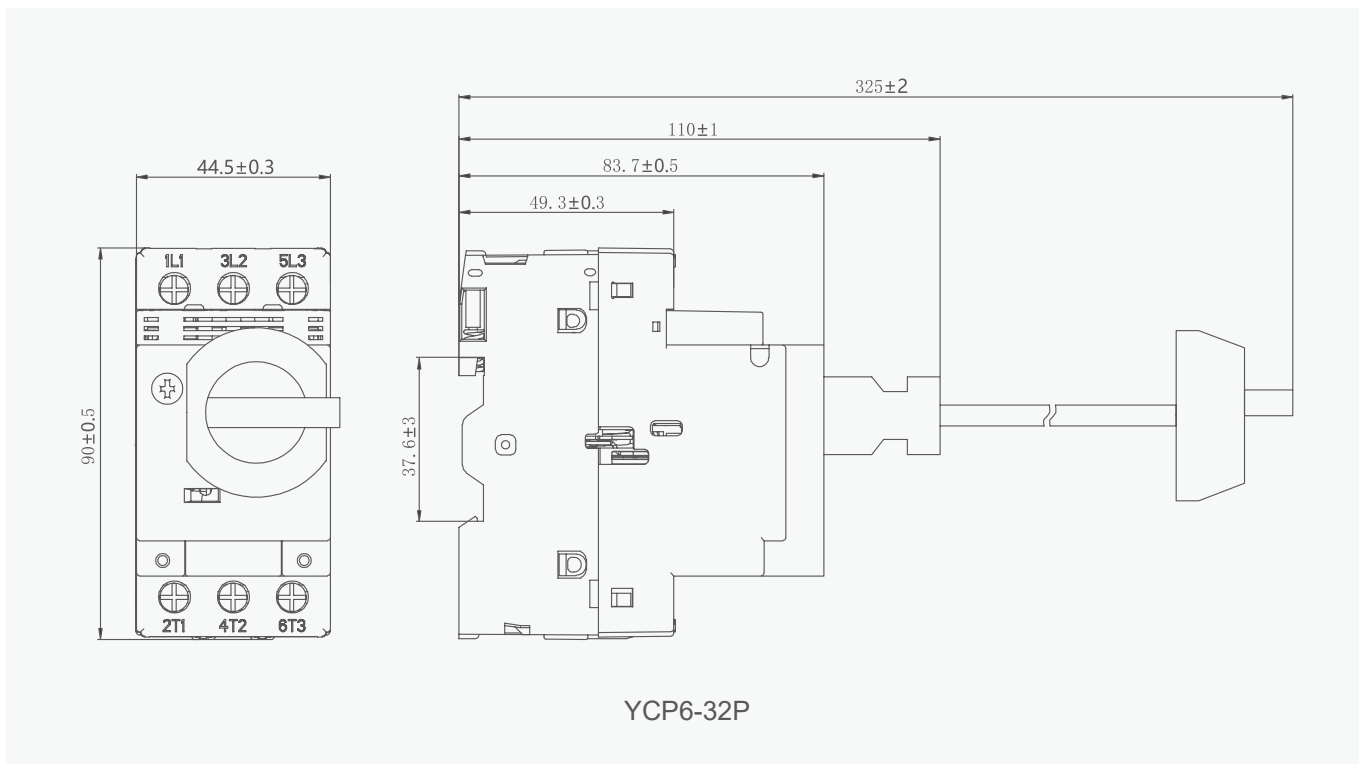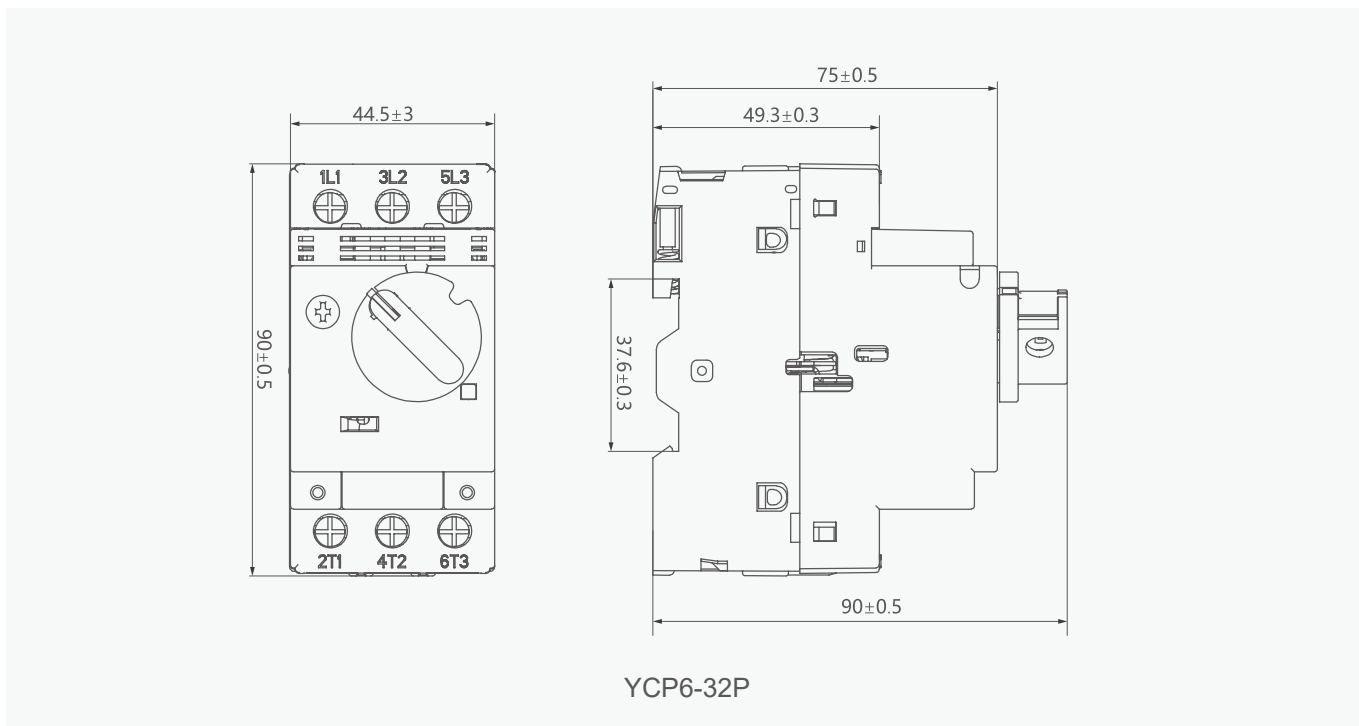

YCP6 Motor Starter

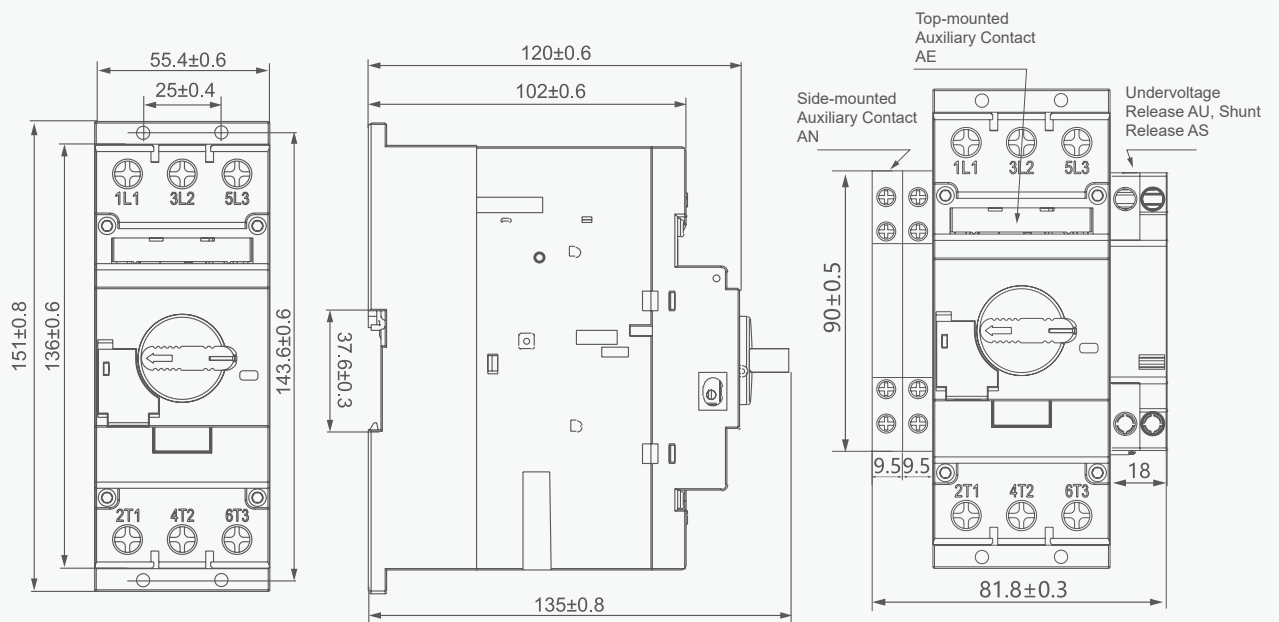

YCP6-80P

