

Relay

ST3PA,ST3PC Time Relay


Features

Used for control of time order
With front-surface and
back-surface connecting sockets
LED pilot, display action state



ST3PA, ST3PC

Model Meaning

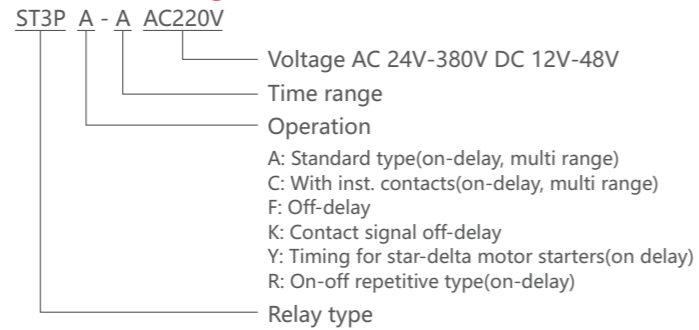

Specification

Item No.	Data
Voltage	DC12V-48V AC24V-380V 50HZ
Power expend	DC1.0W AC1.0VA
Control output	5A 220V AC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈50g
Installing Holing Size	40×50mm

Time Range

Delay categories	Switch position	Switch position			
		1	2	3	4
A		0.05-0.5s	0.05-5s	2.5-30s	0.25-3m
B		0.1-1s	0.1-10s	5-60s	0.5-6m
C		0.5-5s	5-50s	0.5-5m	2.5-30m
D		1-10s	10-100s	1-10m	5-60m
E		5-60s	1-10m	5-60m	0.5-6h
F		0.25-2m	2.5-20m	0.25-2h	1-12h
G		0.5-4m	5-40m	0.5-4h	2-24h

Dimension

