

## Relay

# TH3A-YA Time Relay


### Features

Used for control of time order  
 With front-surface and back-surface  
 connecting sockets  
 LED pilot, display action state



TH3A-YA

### Model Meaning

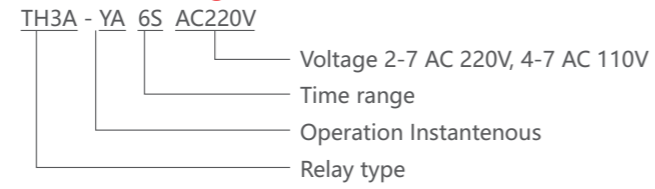

### Specification

Item No.	Data
Voltage	2-7 AC220V, 4-7 AC110V
Power expend	DC1.0W AC1.0VA
Control output	5A 220V AC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 <sup>7</sup> Elec:10 <sup>3</sup>
Weight	≈160g
Installing Holing Size	40×50mm

### Time Range

Rated time	Time range	Rated time	Time range
1s	0.1S~1S	6m	0.3m~6m
2s	0.1S~2S	12m	0.6m~12m
3s	0.1S~3S	30m	1m~30m
6s	0.2S~6S	60m	2m~60m
12s	0.6S~12S	3h	0.1h~3h
60s	2.0S~60S	6h	0.2~6h
2m	5.0S~2m	10h	0.25~10h
3m	0.1m~3m	24h	0.8~24h

### Dimension

