


Electrical Accessories


Terminal Block Series

HC-001

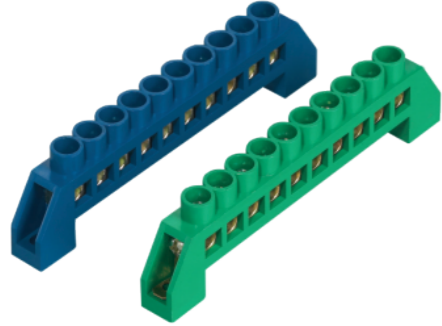


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 100°C.
 Brass. Screw is iron plated zinc. Voltage: 250-450V.
 Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
4	6x9	36	59.5	48.5	29	11	6	M4x7	PA, ABS
6	6x9	53	76.5	65.5	29	11	6	M4x7	PA, ABS
8	6x9	70	93.5	82.5	29	11	6	M4x7	PA, ABS
10	6x9	87	110.5	99.5	29	11	6	M4x7	PA, ABS
12	6x9	105	127.5	116.5	29	11	6	M4x7	PA, ABS
4	8x12	44	59.5	48.5	32	12.5	7	M5x10	PA, ABS
6	8x12	54	76.5	65.5	32	12.5	7	M5x10	PA, ABS
8	8x12	71	93.5	82.5	32	12.5	7	M5x10	PA, ABS
10	8x12	87	110.5	99.5	32	12.5	7	M5x10	PA, ABS
12	8x12	105	127.5	116.5	32	12.5	7	M5x10	PA, ABS




HC-002

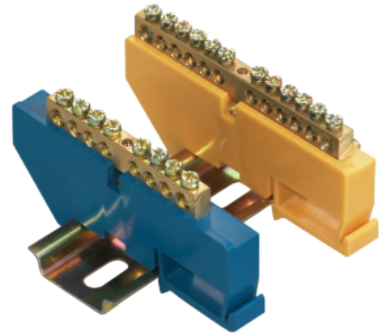

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 100°C.
 Brass. Screw is iron plated zinc. Voltage: 250-450V.
 Color: according to sample picture or customized.


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
8	6x9	60	90	35	43	12	5.2	M4x7	PA, ABS
10	6x9	73	90	35	43	12	5.2	M4x7	PA, ABS
12	6x9	86	90	35	43	12	5.2	M4x7	PA, ABS
14	6x9	99	90	35	43	12	5.2	M4x7	PA, ABS
8	8x12	71	90	35	46	12	6.5	M5x10	ABS, PE
10	8x12	87	90	35	46	12	6.5	M5x10	ABS, PE
12	8x12	103	103	35	46	12	6.5	M5x10	ABS, PE
14	8x12	119	119	35	46	12	6.5	M5x10	ABS, PE

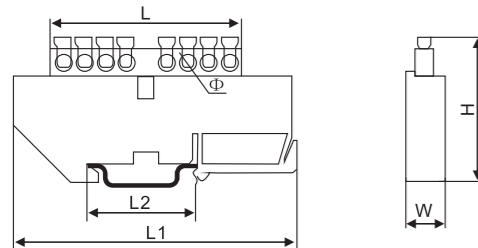

Electrical Accessories


Terminal Block Series

HC-003

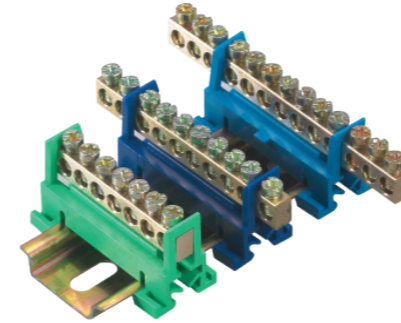


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 100°C.
 Brass. Screw is iron plated zinc. Voltage: 250-450V.
 Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
7	6x9	51	51	35	28	22	5.3	M5x8	PA
8	6x9	59	59	35	28	22	5.3	M5x8	PA
10	6x9	72	72	35	28	22	5.3	M5x8	PA
12	6x9	85	85	35	28	22	5.3	M5x8	PA

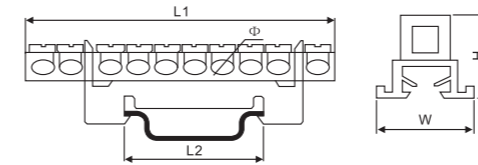


HC-004

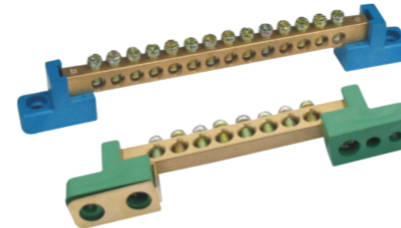

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
6	6x9	53.5	85	72.5	22	12.5	5	M4x7	ABS, PE
7	6x9	60	91.5	79	22	12.5	5	M4x7	ABS, PE
8	6x9	66.5	98	85.5	22	12.5	5	M4x7	ABS, PE
10	6x9	79.5	111	98.5	22	12.5	5	M4x7	ABS, PE
12	6x9	92.5	124	111.5	22	12.5	5	M4x7	ABS, PE
6	8x12	66.5	95.5	82.5	26	12.5	6.5	M5x10	ABS, PE
7	8x12	74.5	103.5	90.5	26	12.5	6.5	M5x10	ABS, PE
8	8x12	82.5	111.5	98.5	26	12.5	6.5	M5x10	ABS, PE
10	8x12	98.5	127.5	114.5	26	12.5	6.5	M5x10	ABS, PE
12	8x12	114.5	143.5	130.5	26	12.5	6.5	M5x10	ABS, PE

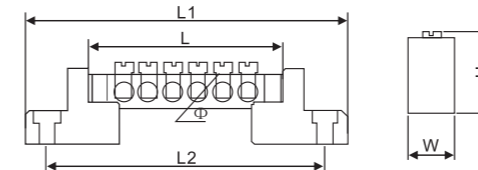


Electrical Accessories

Terminal Block Series

HC-005

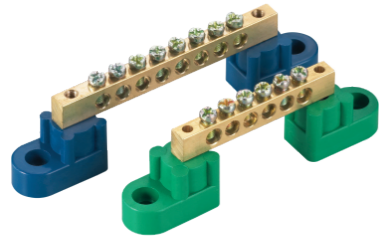


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

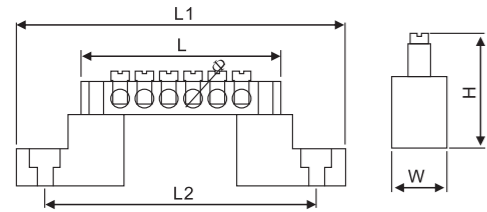


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
8	6x9	60	90	35	43	12	5.2	M4x7	PA, ABS
10	6x9	73	90	35	43	12	5.2	M4x7	PA, ABS
12	6x9	86	90	35	43	12	5.2	M4x7	PA, ABS
14	6x9	99	90	35	43	12	5.2	M4x7	PA, ABS
8	8x12	71	90	35	46	12	6.5	M5x10	ABS, PE
10	8x12	87	90	35	46	12	6.5	M5x10	ABS, PE
12	8x12	103	103	35	46	12	6.5	M5x10	ABS, PE
14	8x12	119	119	35	46	12	6.5	M5x10	ABS, PE

HC-006



PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

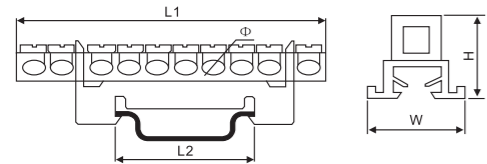


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
7	6x9	51	51	35	32	12	5.3	M5x8	PA
10	6x9	72	72	35	32	12	5.3	M5x8	PA
12	6x9	85	85	35	32	12	5.3	M5x8	PA
15	6x9	104.5	104.5	35	32	12	5.3	M5x8	PA


Electrical Accessories

Terminal Block Series

HC-007

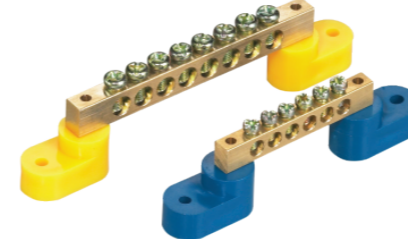


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

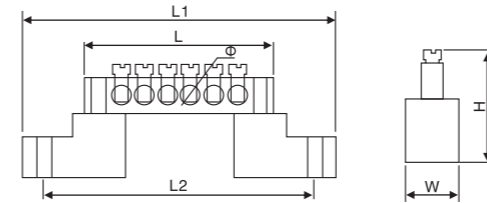


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
6	6x9	53.5	88.5	76.5	27.5	15	5	M4x7	ABS, PE
7	6x9	60	95	83	27.5	15	5	M4x7	ABS, PE
8	6x9	66.5	101.5	89.5	27.5	15	5	M4x7	ABS, PE
10	6x9	79.5	114.5	102.5	27.5	15	5	M4x7	ABS, PE
12	6x9	92.5	127.5	115.5	27.5	15	5	M4x7	ABS, PE
6	8x12	66.5	99.5	87.5	31	15	6.5	M5x10	ABS, PE
7	8x12	74.5	107.5	95.5	31	15	6.5	M5x10	ABS, PE
8	8x12	82.5	115.5	103.5	31	15	6.5	M5x10	ABS, PE
10	8x12	98.5	131.5	119.5	31	15	6.5	M5x10	ABS, PE
12	8x12	114.5	147.5	135.5	31	15	6.5	M5x10	ABS, PE

HC-008

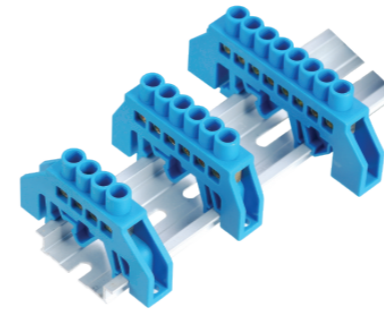

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

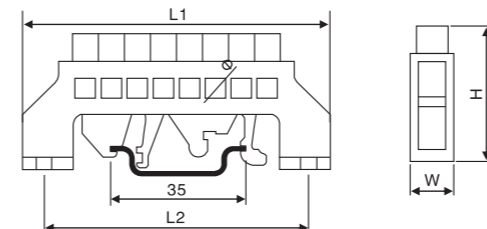


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
4	6x9	27	57	48	35	11	5	M4x7	PA
6	6x9	40	57	48	35	11	5	M4x7	PA
8	6x9	53	78	66	35	11	5	M4x7	PA
10	6x9	66	89	77	35	11	5	M4x7	PA
12	6x9	79	102	90	35	11	5	M4x7	PA

Electrical Accessories


Terminal Block Series

HC-009

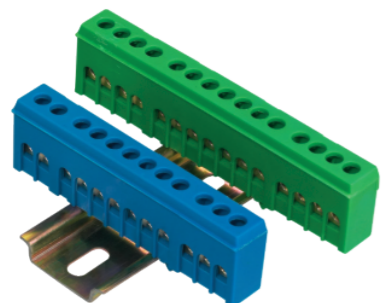


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
7	6×9	51	55	35	32	14	5.3	M5×8	PA
10	6×9	72	76	35	32	14	5.3	M5×8	PA
12	6×9	85	89	35	32	14	5.3	M5×8	PA
15	6×9	104.5	108.5	35	32	14	5.3	M5×8	PA

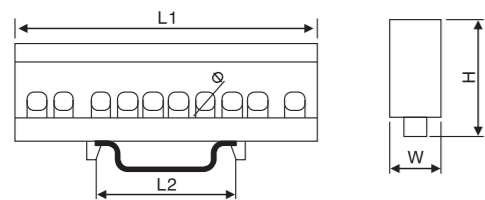


HC-010

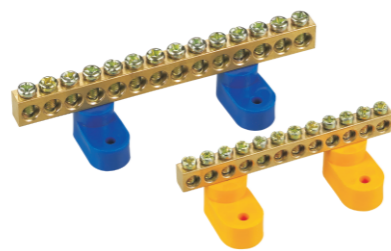

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
6	6×9	42	42	19.5	28	30	5.3	M4×8	ABS, PE
8	6×9	55	55	19.5	28	30	5.3	M4×8	ABS, PE
10	6×9	68	68	32.5	28	30	5.3	M4×8	ABS, PE
12	6×9	71	71	32.5	28	30	5.3	M4×8	ABS, PE
14	6×9	84	84	32.5	28	30	5.3	M4×8	ABS, PE
6	8×12	46	46	22.5	32	30	6	M5×9	ABS, PE
8	8×12	61	61	22.5	32	30	6	M5×9	ABS, PE
10	8×12	76	76	37.5	32	30	6	M5×9	ABS, PE
12	8×12	91	91	37.5	32	30	6	M5×9	ABS, PE
14	8×12	106	106	37.5	32	30	6	M5×9	ABS, PE

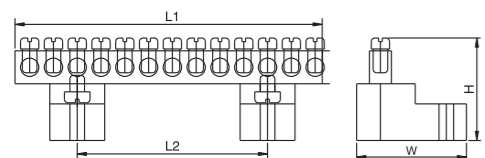

Electrical Accessories


Terminal Block Series

HC-0012



PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
7	6×9	54	54	20	30	20	5.3	M5×8	

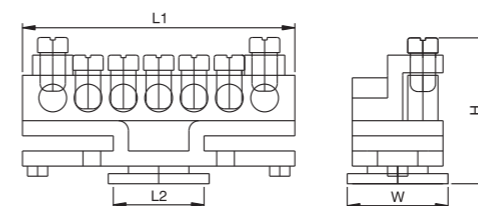


HC-013



PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
4	1.2		90	78	30	22	6(2×8)		PA
6	1.2		105	93	30	22	6(2×8)		PA
8	1.2		120	108	30	22	6(2×8)		PA
10	1.2		135	123	30	22	6(2×8)		PA
12	1.2		150	139	30	22	6(2×8)		PA

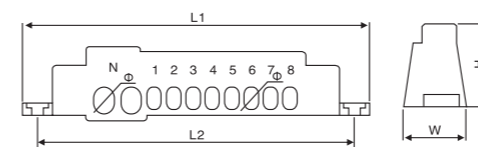

Electrical Accessories


Terminal Block Series

HC-014




PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
6	1.2		81	51	33	29	6(2×8)		PA
8	1.2		96	66	33	29	6(2×8)		PA
10	1.2		111	81	33	29	6(2×8)		PA
12	1.2		126	96	33	29	6(2×8)		PA
14	1.2		141	111	33	29	6(2×8)		PA

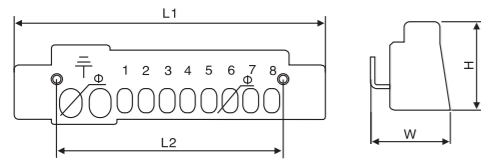


HC-016

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

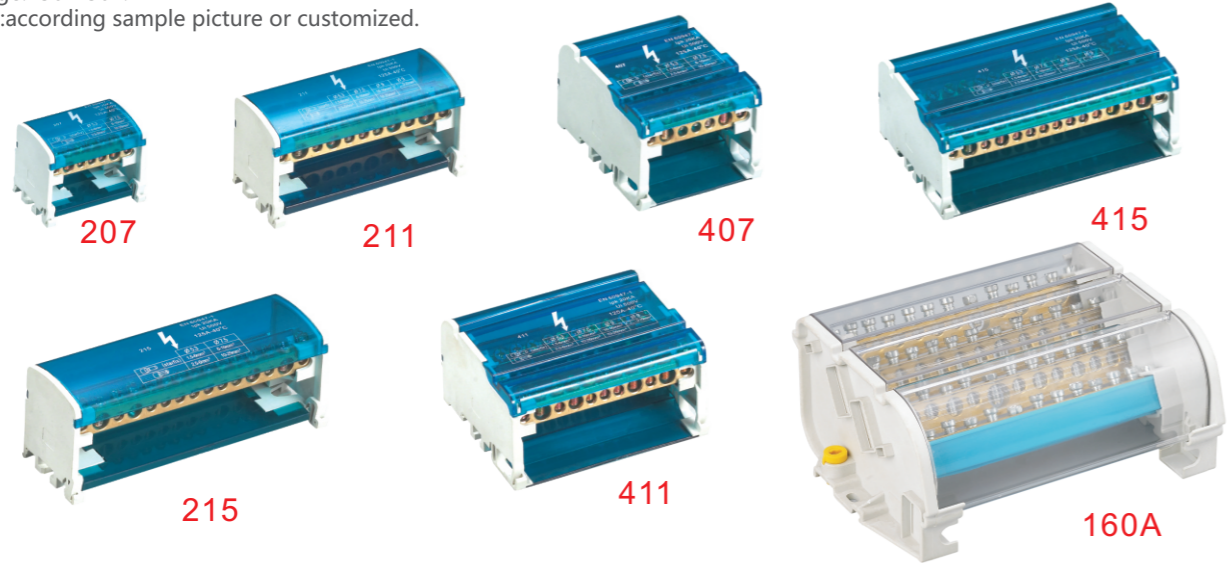

Item No.	Spec.	Rated current (A)	Rated voltage (V)	L1	L2	H	W	最大进线 Max. section	进线数量 Hole. Qty	塑料材质 Plastic Setting
	Wxh	mm								
207	6.5 × 12	125A	500V	67	48	50	45	35mm ²	2 × 7	PA
211	6.5 × 12	125A	500V	100	86	50	45	35mm ²	2 × 11	PA
215	6.5 × 12	125A	500V	134	118	50	45	35mm ²	2 × 15	PA
407	6.5 × 12	125A	500V	67	48	50	90	35mm ²	4 × 7	PA
411	6.5 × 12	125A	500V	100	86	50	90	35mm ²	4 × 11	PA
415	6.5 × 12	125A	500V	134	118	50	90	35mm ²	4 × 15	PA
413	8 × 17	160A	500V	180	168	73	138	50mm ²	4 × 13	PA

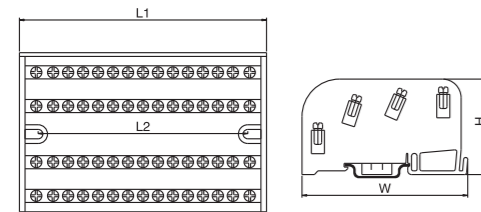

Electrical Accessories


Terminal Block Series

HC-017




PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

Item No.	Spec.	Rated current (A)	Rated voltage (V)	L1	L2	H	W	最大进线 Max. section	进线数量 Hole. Qty	塑料材质 Plastic Setting
	Wxh	mm								
420	4 × 15	200A	500V	280	128	115	190	75mm ²	4 × 11	PA
425	5 × 20	250A	500V	280	128	115	190	100mm ²	4 × 11	PA
440	6 × 25	400A	500V	280	128	115	190	185mm ²	4 × 10	PA

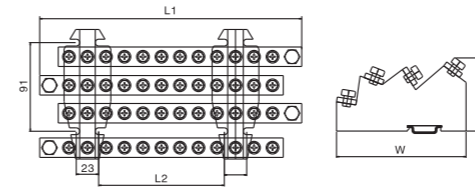


HC-018

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

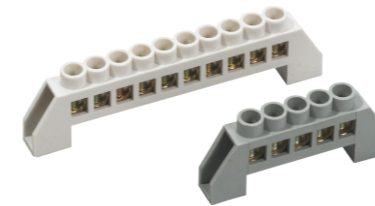


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
4	1.2		90	78	30	22	6(2×8)		PA
6	1.2		105	93	30	22	6(2×8)		PA
8	1.2		120	108	30	22	6(2×8)		PA
10	1.2		135	123	30	22	6(2×8)		PA
12	1.2		150	139	30	22	6(2×8)		PA

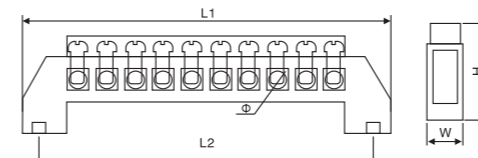

Electrical Accessories


Terminal Block Series

HC-022

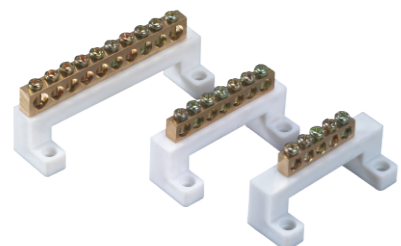

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
Brass. Screw is iron plated zinc.
Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
5	7×11	42.5	73	60	37	26	6.5(2×7)	M5×8	ABS, PE
7	7×11	58.5	73	60	37	26	6.5(2×7)	M5×8	ABS, PE
10	7×11	82.5	103	90	37	26	6.5(2×7)	M5×8	ABS, PE
5	8×13	52	73	60	40	26	7(2×9)	M5×10	ABS, PE
7	8×13	70	73	60	40	26	7(2×9)	M5×10	ABS, PE
10	8×13	97	103	90	40	26	7(2×9)	M5×10	ABS, PE

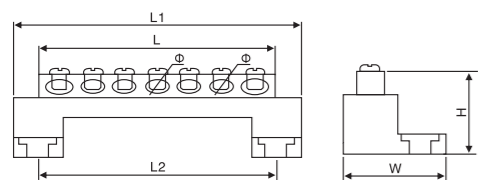


HC-023




PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
Brass. Screw is iron plated zinc.
Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
6	6×9	42	42	20	21	30	5.3	M4×8	ABS, PE
8	6×9	55	55	20	21	30	5.3	M4×8	ABS, PE
10	6×9	68	68	33	21	30	5.3	M4×8	ABS, PE
12	6×9	71	71	33	21	30	5.3	M4×8	ABS, PE
14	6×9	84	84	33	21	30	5.3	M4×8	ABS, PE

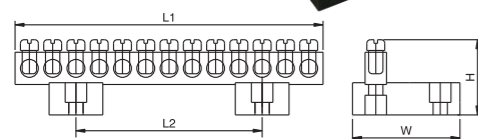


HC-026



ABS, good resist dissolve, good bounce impact fore. Working Temperature: -20°C to 70°C.
Brass. Screw is iron plated zinc.
Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
1+4	9×18	64	82	68	29	42	5.3	M5×8	ABS, PE
1+6	9×18	80	98	84	29	42	5.3	M5×8	ABS, PE
1+8	9×18	96	114	100	29	42	5.3	M5×8	ABS, PE
1+4	12×18	64	82	68	29	42	5.3	M5×8	ABS, PE
1+6	12×18	80	98	84	29	42	5.3	M5×8	ABS, PE
1+8	12×18	96	114	100	29	42	5.3	M5×8	ABS, PE

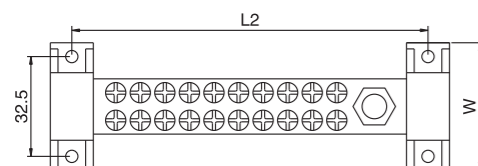

Electrical Accessories


Terminal Block Series

HC-024



ABS, good resist dissolve, good bounce impact fore. Working Temperature: -20°C to 70°C.
Brass. Screw is iron plated zinc.
Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
5	7×11	42.5	120	70	35	16	6.5(2×7)	M5×8	ABS, PE
7	7×11	58.5	120	70	35	16	6.5(2×7)	M5×8	ABS, PE
10	7×11	82.5	120	70	35	16	6.5(2×7)	M5×8	ABS, PE

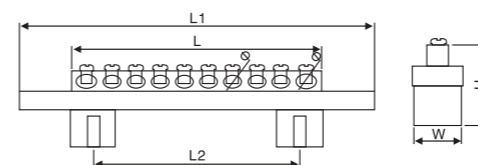

HC-025



ABS, good resist dissolve, good bounce impact fore. Working Temperature: -20°C to 70°C.
Brass. Screw is iron plated zinc.
Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
3	7×10	33	59.5	49.5	35	15	6.5	M5×9	ABS
4	7×10	41	67.5	57.5	35	15	6.5	M5×9	ABS
5	7×10	49	75.5	65.5	35	15	6.5	M5×9	ABS
6	7×10	57	83.5	73.5	35	15	6.5	M5×9	ABS
7	7×10	65	91.5	81.5	35	15	6.5	M5×9	ABS
8	7×10	73	99.5	89.5	35	15	6.5	M5×9	ABS
10	7×10	90	116.5	106.5	35	15	6.5	M5×9	ABS
12	7×10	106	132.5	122.5	35	15	6.5	M5×9	ABS
15	7×10	130	156.5	146.5	35	15	6.5	M5×9	ABS
3	9×15	46	68	58	35	15	9(2×10)	M5×12	ABS
5	9×15	68	90	80	35	15	9(2×10)	M5×12	ABS
7	9×15	90	112	102	35	15	9(2×10)	M5×12	ABS
8	9×15	101	123	113	35	15	9(2×10)	M5×12	ABS
10	9×15	123	145	135	35	15	9(2×10)	M5×12	ABS
12	9×15	145	167	157	35	15	9(2×10)	M5×12	ABS
15	9×15	178	200	190	35	15	9(2×10)	M5×12	ABS

